


MOV-A

HPV

Hydraulic
Proportional
Valves

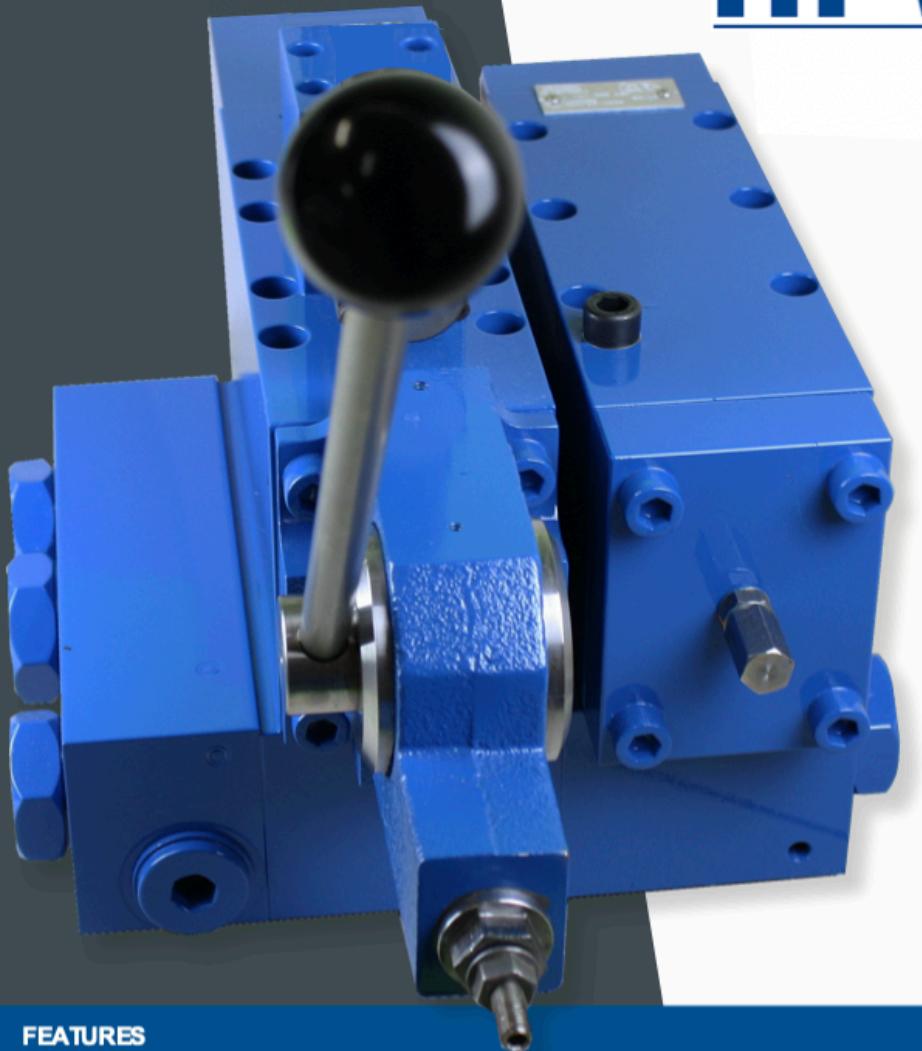

AMCA
HYDRAULIC
CONTROLS

FEATURES

* Load independent flow control corresponds to the spool-position proportional to the hydraulic input signal.

* The pump pressure always corresponds to the user pressure, +3,6,8 or 12 bar (43, 86, 114 or 172 psi) Δp compensator.

* The built-in pump-unloading valve results in:
- very low power turned into heat;
- minimum loading of the prime mover.

* User speed is precisely controlled under all load conditions.

* Progressive regulating curve; no pressure peaks when switching; sensitive control even for alternating pressures.

* Constant working speed of differential cylinders at the different regulating flow to the valve by grinding angle.

* Constant recirculation pressure independent of the number of units.

* Any limiting of flow for every user port.

* Load independent switching adjustment, constant acceleration and deceleration.

* Proportional directional control valves also available as:

- Manual proportional series MHV and
- Electrical proportional series MEV

Any combination of these control options is possible.

* The sub plate system allows a construction up to 8 control valves.

TECHNICAL DATA











Assembly system	sandwich or subplate design
Operating pressure (P,A,B)	...350 bar (5000 psi)
Maximum return pressure (T):	30 bar (428 psi)
Δp compensator	3; 6; 8 or 12 bar (43; 86; 114 or 172 psi)
Pressure setting range	5...350 bar (72...5000 psi)
Flow range	...800 l/min (...211 USgpm)- with 32 cSt at 40°C
Fluid	Mineral oil according to DIN 51524/51525
Fluid temperature range	-35...+80°C (-31°...+176°F)
Viscosity range	2,8...380 cSt, optimal 30 cSt
Contamination level max.	according to NAS 1638 Class 9 or ISO 18/15
Mounting position	optional
Control characteristics	3 - 12 bar (43 - 172 psi) or 6 - 22 bar (86 - 315 psi)
Size working ports:	MOV12 : 1/2" BSP (SAE optional) MOV16 : 3/4" BSP (SAE optional) MOV20 : 1" BSP (SAE optional) MOV25 : 1 1/4" BSP (SAE optional) MOV32 : 1 1/2" BSP (SAE optional)

Table 1: Max. flow in l/min. (USgpm) related to the Δp in bar (psi) over the compensator, per nominal bore:

Size	Δp compensator			
	3 (43)	6 (86)	8 (114)	12 (172) ¹⁾
MOV 12	50 (13)	80 (21)	90 (24)	100 (26)
MOV 16	100 (26)	140 (37)	155 (41)	180 (47)
MOV 20	160 (42)	225 (59)	250 (66)	300 (79)
MOV 25	250 (66)	350 (92)	390 (103)	500 (132)
MOV 32	400 (106)	500 (132)	550 (145)	800 (211)

¹⁾ Due to loss of pressure c.q. energy conversion into heat, we recommend the next largest size related to a lower Δp compensator.

Tabel 2: Directional control valve: spooltypes and symbols:

Spool types	Symbols	Operation Characteristic	Spool types	Symbols	Operation Characteristic
A 4/3 way		In neutral position all ports blocked ²⁾	F 4/2 way		In neutral position all ports blocked ²⁾
B 4/3 way		In neutral position, A - T, 20% of nominal bore ²⁾	G 4/2 way		In neutral position, A+B - T, 20% of nominal bore ²⁾
C 4/3 way		In neutral position, A+B - T, 20% of nominal bore ²⁾	K 3/3 way		Port A out of function position a additional ²⁾
D 4/3 way		In neutral position, B - T, 20% of nominal bore ²⁾	M 3/2 way		Port A out of function P-B, 70% of nominal bore
E 4/2 way		P - B and A - T, 70% of nominal bore	O 3/2 way		Port B out of function port T leakage flow ²⁾

²⁾ recirculation at low pressure only with MUV



HPV b.v.

A. Einsteinlaan 27
9615 TE Kolham
The Netherlands

T: +31 (0) 598 - 22 70 80

E: sales@hpv-nl.com

www.hpv-nl.com